

IS D360

EAN 4007841 601317



infrared sensor
360°



max. 8 m

1000w

1000 W max.
(LED-ready)



IP20



2 - 2000 lux



5 sec - 20 min



ideal 2,5 m



energy saving



5 JAHRE
HERSTELLER
GARANTIE
Herstellerhaftung für die Garantie

manufacturer's
warranty
steinel-professional.de/garantie



CE

Function description

The compact class. Recessed ceiling motion detector IS D360 for indoors, ideal for mounting in any standardized spot bezel, installation height up to 2.5 m, in the size of a bulb (e.g. GU10), 360° angle of coverage, max. reach 8 m (tangential), floating contact 50-250 volts.


Technical specifications

Type	Motion detectors	Time setting	5 s – 20 Min.
Dimensions (Ø x H)	83 x 82 mm	Switching output 1, resistive	1000 W
Mains power supply	230 – 240 V / 50 Hz	Fluorescent lamps, uncorrected	500 VA
Sensor Technology	passive infrared	Fluorescent lamps, series-corrected	900 VA
Application, place	Indoors	Fluorescent lamps, parallel-corrected	500 VA
Installation site	ceiling	Constant-lighting control	No
Installation	Concealed wiring	Basic light level function	No
Mounting height	2,50 – 4,00 m	Settings via	Potentiometers
Reach, radial	Ø 8 m (50 m ²)	With remote control	No
Reach, tangential	Ø 16 m (201 m ²)	Interconnection	Yes
Detection angle	360 °	Type of interconnection	Master/master
Angle of aperture	180 °	IP-rating	IP20
Switching zones	720 switching zones	Material	Plastic
Optimum mounting height	2,5 m	Ambient temperature	-20 – 50 °C
Mechanical scalability	No	Application, room	corridor / aisle, function room / ancillary room, WC / washroom, Indoors
Sneak-by guard	Yes	Colour	white
Capability of masking out individual segments	Yes	Colour, RAL	9010
Electronic scalability	No	Manufacturer's Warranty	5 years
Twilight setting TEACH	No	PU1, EAN	4007841601317
Twilight setting	2 – 2000 lx		

IS D360

EAN 4007841 601317

Detection Zone

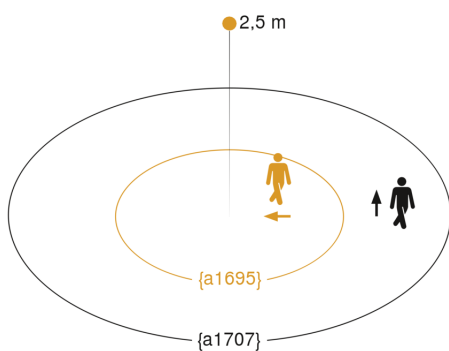

Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

